



产品参数/Specification

Model		LKAD082V-T	备注
输入 Input	输入电压范围/Input Voltage range	120-277V	
	频率/Frequency	50/60hz	
	谐波/THD	≤15%	
	功率因数/Power factor	0.999/120VAC	
	输入电流 Input current (mA)	800MA/120VAC	
	待机功耗 stand_by power	≅2.5W	
	浪涌电流 Inrush Current (Max.)	≤68A@277VAC	
	漏电流 Leakage Current	<1MA/277VAC	
输出 Output	额定电压/Rated voltage	24V	
	空载电压/No-load Voltage	≅24.5V	
	工作电压范围/working voltage range	23.5-24.2V	
	可选择电压规格/selectable voltage	12V/24V/48V	
	电压精度/Current tolerance	(+/-)1%	
	额定功率/Rated power	96W	
	开机延时/Setup Time	≤0.5s/120VAC	
	输出线性调整率Output Line Regulation	±3%	
	温度漂移temperature drift	±3%	
保护特性	开路保护Output open circuit protection	有/Enable	
	短路保护Short Circuit Protection	打嗝模式/Hiccup mode	

- 120-277VAC (50/60Hz) 输入 / 120-277VAC (50/60Hz) Input
- 隔离高PF无闪烁方案,。采用最新的调光信号与主输出的隔离调光认证方案 Flicker free with high PF isolation, . Using the latest dimming signal and main output isolation dimming certification scheme
- 高效率、高功率因素, 高稳定性, 高调光比 High efficiency, high power factor, high stability, high light ratio
- 短路保护, 过流保护, 过压保护, 过温保护 / Short circuit, over voltage, over current and over temperature protection;
- 多重调光方式可选择 (0/1-10V V-R PWM Traic); Multiple dimming modes are optional.
- 防护等级 IP65 degree of protection IP65;
- 实现了真正的0-10V调光, 全程无闪烁, 兼容市场上所有的调光控制系统。 It realizes true 0-10V dimming, no flicker in the whole process, and is compatible with all dimming control systems in the market.
- 3年质保期/ 3 years warranty.
- 调光输出高频的PWM信号, 可以实现任何功率段的调光。 Dimming output with high frequency PWM signal and can

使用环境 Environment Requirements	工作温度/湿度要求 Operating Temp./RH	-30~+45℃/20~95%	
	储存温度,湿度要求 Storage Temp./RH	-40~+80℃/10~95%	
安全和电磁兼容 Safety & EMC	认证编号/Certificate	符合CE/ meet CE	
	耐压 withstand voltage	3750MA/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5 (L-N:1KV)	
	安规标准Safety standard	EN61347, GB19510, UL8750	
	电磁干扰electromagnetic interference	EN55015, EN61000-3-2	
	电磁抗干扰Electromagnetic Susceptibility	EN61000-4-2. 3. 4. 5. 6. 8. 11. EN61547	
其他 Others	IP等级说明 IP level description	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	180*60*35MM	
	重量/Netweight		
注意事项 matters needing attention	<p>1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1. pls suggest the client to instal the unde voltage protection device and surge protection device to ensure Electricity safety</p> <p>2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3. Becareful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated</p>		

测试数据/Test data

输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (mA)	输出功率 Output Power (W)	转换效率 Efficiency (%)
120V	786.00	94.20	0.997	24.05	3350	80.57	85.5%
	588.00	70.60	0.990	24.05	2500	60.13	85.2%
	253.00	30.16	0.980	24.05	1000	24.05	79.7%
240V	373.40	92.13	0.973	24.05	3350	80.57	87.4%
	335.60	69.64	0.981	24.05	2500	60.13	86.3%
	280.00	30.90	0.981	24.05	1000	24.05	77.8%
277V	386.00	92.50	0.956	24.05	3350	80.57	87.1%
	296.20	70.00	0.910	24.05	2500	60.13	85.9%
	132.00	30.80	0.880	24.05	1000	24.05	78.1%

调光测试效果Dimming effect

(欧规240V品牌调光器测试/European standard 240V brand dimmer test)

编号 NO	调光器型号 Dimmer Type	最小瓦数 Minimum wattage(W)	最大瓦数 Maximum wattage (W)	调光比 Dimming ratio	调光器种类 The type of dimmer	备注 remarks
1	T&J 25-1000W	24W	103.5W	23-100%	Leading	p
2	Lautrupvang DK-275D	23.5W	104W	22.2-100%	Trailing	p
3	European-No 2	15.9W	107W	14.5-100%	Trailing	p
4	TENGEN V5-TG/G	28.1W	109.5W	26-100%	Leading	p
5	Nader	22.6W	108W	21-100%	Leading	p
6	CLIPSAL 500VA	4.2WW	88W	4.8-100%	Leading	p
7	Midea 220V 630W	28W	110W	25.4-100%	Leading	p
8	European-No 1	9.0W	108W	8.3-100%	Trailing	p
9	TCL 630W 220V	18W	111.2W	16.2-100%	Leading	p
10	SHYUSLC UK-PRD400VA	15.5W	105W	14.7-100%	Trailing	p

调光测试效果Dimming effect


(美规120V品牌调光器测试/Testing of American Standard 120V dimmer)

编号 NO	调光器型号 Dimmer Type	最小瓦数 Minimum wattage(W)	最大瓦数 Maximum wattage (W)	调光比 Dimming ratio	调光器种类 The type of dimmer	备注 remarks
1	Lutron SB-1 600W	0.156W	105.5W	0.1-100%	Leading	P
2	LC211	5.09W	103.3W	5-100%	Leading	P
3	Lutron TTCL100	11.5W	99W	12-100%	Leading	P
4	TLC-0005	15.5W	108.5W	14.2-100%	Trailing	P
5	PEC-002	11W	105.5W	10.5-100%	Leading	P
6	TLC-0003	15.9W	110W	14.5-100%	Leading	P
7	LEVLTON 150W	39W	100W	39-100%	Leading	P
8	PanaSonic Wn3020	6.6SW	90.9W	7.2-100%	Leading	P


0-10V调光测试数据Dimming test data

输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	调光比 Dimming ratio	调光电压 Dimming voltage (V)	备注
120	988.00	114.00	0.991	24.05	100.00%	10	
120	930.00	109.00	0.99	23.54	95.60%	9	
120	818.00	96.70	0.99	22.57	85.00%	8	
120	713.00	84.50	0.99	21.54	74.00%	7	


120	607.00	72.00	0.99	20.43	63.00%	6	
120	499.00	59.20	0.99	19.26	52.00%	5	
120	398.00	47.20	0.99	18.16	41.00%	4	
120	303.00	35.70	0.99	17.09	31.00%	3	
120	206.00	24.20	0.98	16.04	21.00%	2	
120	109.00	12.20	0.95	14.92	11.00%	1	
120	62.20	6.42	0.86	14.39	5.60%	0.5	

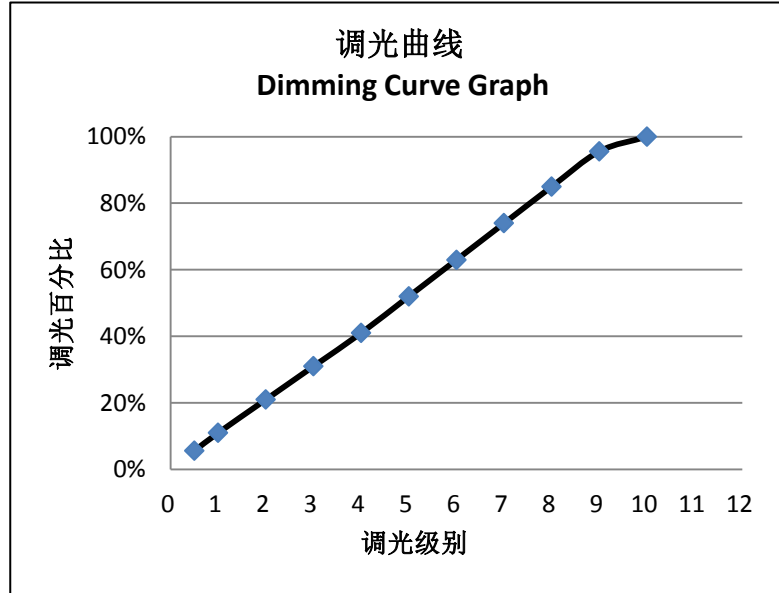

产品尺寸图/ Product Size Diagram

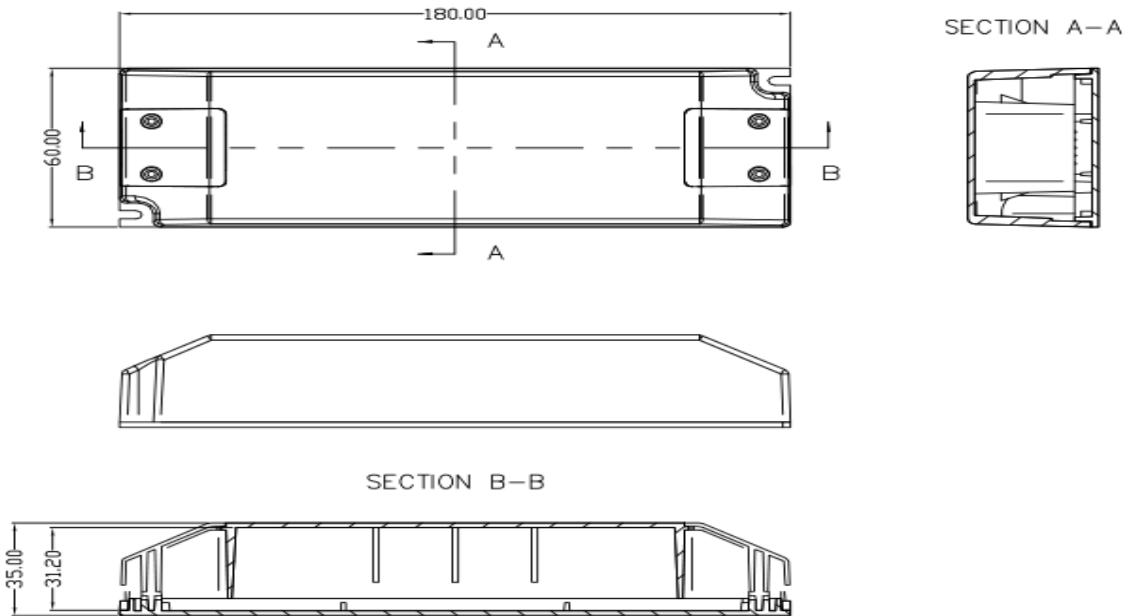

产品接线示意图/ Product Connection Diagram

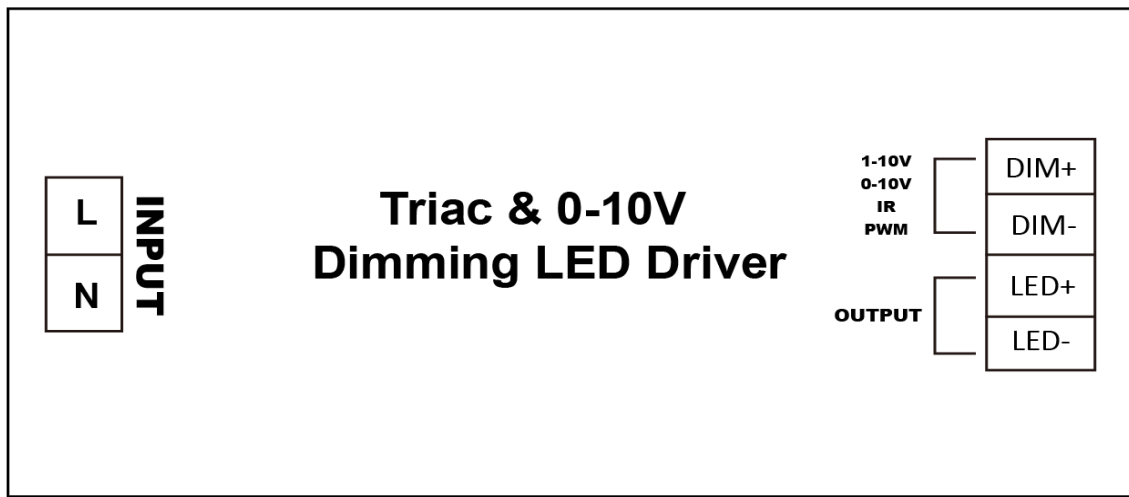

备注/Note:

"1. 所有没提及到的参数都是在220V输入，额定负载和在周围温度为25℃的情况下测试的；
All parameters NOT specially mentioned are measured at 220VAC input, rated load and 25 of ambient temperature;

2.注意接线的方向，不要搞反输入和输出端

Pay attention to the direction of wiring, do not reverse the input and output terminals

广东领冠智能科技有限公司

Guangdong Linkuan Smart Tech Co.,Ltd

地 址：广东省东莞市万江区大莲塘工业区3号

Address: NO.3 Building, Daliantang Industrial Park,
Wanjiang

District,Dongguan,Guangdong,China

Tel:+86-769-23129651

Fax:+86-23129652